

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 October 2003 (30.10.2003)


PCT

(10) International Publication Number
WO 03/090246 A2

- (51) International Patent Classification⁷: **H01J 17/49**,
C09K 11/77, G02B 5/20
- (21) International Application Number: PCT/IB03/01285
- (22) International Filing Date: 9 April 2003 (09.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
102 17 552.7 19 April 2002 (19.04.2002) DE
- (71) Applicant (for DE only): **PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-
damm 94, 20099 Hamburg (DE).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **JUESTEL, Thomas**
[DE/DE]; c/o Philips Intellectual Property & Standards
GmbH, Weissshausstr. 2, 52066 Aachen (DE). **MAYR,**
Walter [DE/DE]; c/o Philips Intellectual Property &
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (74) Agent: **MEYER, Michael**; Philips Intellectual Property &
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: PLASMA DISPLAY PANEL COMPRISING A TERBIUM(III)-ACTIVATED FLUORESCENT SUBSTANCE

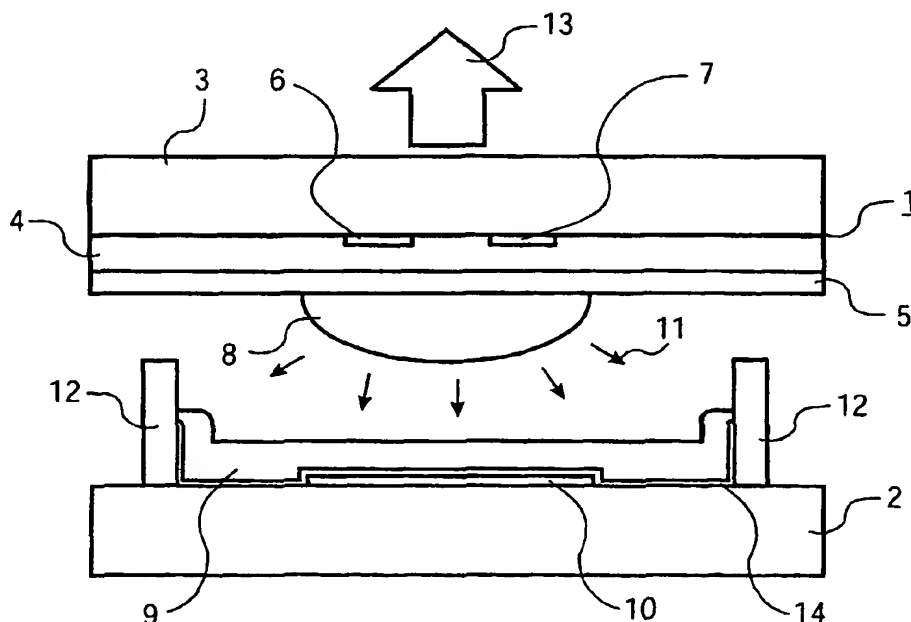

(57) Abstract: The invention relates to plasma display panels with a segmented fluorescent layer (9), in which green color filter layers (14) of Pr³⁺-containing materials of green-emitting color segments are deposited between the fluorescent layer (9) and the carrier plate (2), which improve the color dot of the green light which is emitted by the Tb³⁺-activated fluorescent substance.



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

Plasma display panel comprising a terbium(III)-activated fluorescent substance

The invention relates to a plasma display panel equipped with a front plate which has a glass plate on which a dielectric layer and a protective layer are deposited, with a carrier plate covered by a segmented fluorescent layer which contains red-emitting color segments of a red-emitting fluorescent substance, blue-emitting color segments of a blue-emitting fluorescent substance and green-emitting color segments of a green-emitting Tb³⁺-activated fluorescent substance, has a rib structure which divides the space between front plate and carrier plate into plasma cells which are gas-filled, with one or more electrode arrays on the front plate and the carrier plate for generating silent electrical discharges in the plasma cells.

Plasma display panels make high-resolution color pictures possible, large display panel diagonals and are of compact structure. A plasma display panel has a hermetically sealed glass cell which is gas-filled, with grid-like arranged electrodes. By applying an electric voltage, a gas discharge is caused which generates light in the ultraviolet range (145 to 185 nm). This light can be transformed to visible light by fluorescent substances and be emitted to the viewer through the front plate of the glass cell.

For plasma display panels are used fluorescent substances which are highly efficient under vacuum-UV excitation. Frequently used green-emitting fluorescent substances are, for example, Zn₂SiO₄:Mn (ZSM) or BaAl₁₂O₁₉:Mn (BAL). The two materials show a saturated green emission color with a high y value of $y > 0.7$. A disadvantage of the two materials is a relatively long decay time $t_{1/10}$, which is about 30 ms for Zn₂SiO₄ with 2.5% Mn. This is caused by the fact that the spin of the transition $^4T_1 \rightarrow ^6A_1$, which is relevant for the emission of the light, is forbidden. In addition, the decay time $t_{1/10}$ and the color point of an Mn²⁺-activated fluorescent substance strongly depend on the concentration of Mn²⁺. A further disadvantage is the sensitivity of Mn²⁺ as against an oxidation to Mn³⁺ or Mn⁴⁺, which reduces the stability of the fluorescent substance.

Contrary to this, Tb³⁺-activated fluorescent substances are stable as regards temperature and picture, because Tb³⁺ is hard to be oxidized to Tb⁴⁺. A further advantage of this fluorescent substance as against Mn²⁺-activated fluorescent substances is their shorter decay time $t_{1/10}$, which amounts to 2 to 10 ms depending on the host lattice.

CONFIRMATION COPY

Therefore, US 6,004,481 describes a green-emitting Tb^{3+} -activated fluorescent substance for applications in plasma display panels, which has the composition $(Y_{1-x-y-z}Gd_xTb_yCe_z)BO_3$, where $0.0 < x < 0.2$, $0.01 < y < 0.1$ and $0.0 < z < 0.1$.

5 A large disadvantage of Tb^{3+} -activated fluorescent substance is its yellow-green color point, which has a low y value of $y < 0.62$.

It is an object of the invention to provide a plasma display panel with a Tb^{3+} -activated fluorescent substance whose green sub-pixels produce light with an improved color dot.

10 The object is achieved by a plasma display panel equipped with a front plate which has a glass plate on which a dielectric layer and a protective layer are deposited, with a carrier plate covered by a segmented fluorescent layer which contains red-emitting color segments of a red-emitting fluorescent substance, blue-emitting color segments of a blue-emitting fluorescent substance and green-emitting color segments of a green-emitting Tb^{3+} -activated fluorescent substance, has a rib structure which divides the space between front
15 plate and carrier plate into plasma cells which are gas-filled, with one or more electrode arrays on the front plate and the carrier plate for generating silent electrical discharges in the plasma cells, and has a green color filter layer between a green-emitting color segment of the fluorescent layer and the carrier plate.

20 Besides a strong light emission with a wavelength between 540 and 550 nm, Tb^{3+} -activated fluorescent substances also have, although clearly weaker, emission bands in the yellow and red spectral area. The intensity of these emission bands can be reduced by a green color filter layer and thus the y values of the color points of the Tb^{3+} -activated fluorescent substance can be increased.

25 The advantageously selected materials for a green color filter layer as claimed in claim 2 and claim 3 have a high transmission between 530 and 550 nm.

The advantageously selected Tb^{3+} -activated fluorescent substances as claimed in claim 4 are highly efficient green-emitting fluorescent substances when excited with VUV light.

30 These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1 shows the structure and the function principle of a single plasma cell in an AC plasma display panel with a green-emitting color segment of the fluorescent layer and a green color filter layer.

5

As shown in Fig. 1 a plasma cell of an AC plasma display panel with a coplanar arrangement of electrodes has a front plate 1 and a carrier plate 2. The front plate 1 has a transparent plate 3, for example made of glass on which are deposited a dielectric layer 4 which preferably contains low-melting glass and on top of it a protective layer 5 which preferably contains MgO. Parallel striped discharge electrodes 6, 7 which are covered by the dielectric layer 4 are deposited on the transparent plate 3. The discharge electrodes 6, 7 are made for example of metal, ITO or a combination of a metal and ITO. The discharge electrodes 6, 7 preferably each comprise a strip of ITO on which a narrower layer of Al or Ag is deposited as a bus electrode. The carrier plate 2 is preferably made of glass and on the carrier plate 2 are deposited parallel strip-like address electrodes 10 of, for example, Ag which run perpendicularly to the discharge electrodes 6, 7. These address electrodes 10 are covered by a fluorescent layer 9 which emits light 13 into one of the three basic colors red, green or blue. For this purpose the fluorescent layer 9 is subdivided into a plurality of color segments. A rib structure 12 with separating ribs of preferably dielectric material forms individually drivable plasma cells in which silent electric discharges occur.

There is a gas in the plasma cell and also between the discharge electrodes 6, 7 of which one alternately works as a cathode or an anode respectively. The gas may be, for example, a rare gas, a mixture of rare gases with Xe as an UV light-emitting component, nitrogen or a mixture of nitrogen and at least one rare gas such as, for example, He, Ne, Kr or Xe. After igniting the surface discharge as a result of which charges can flow along a discharge path between the discharge electrodes 6, 7 in the plasma area 8, a plasma is formed in the plasma area 8 by which plasma radiation 11 is generated in the UV range mostly in the VUV range depending on the composition of the gas. The radiation 11 excites the fluorescent layer 9 to radiate, which layer emits visible light 13 which comes out through the front plate 1 and thus represents a lighting dot on the display panel. The fluorescent layer 9 is subdivided into a plurality of color segments. Customarily the red, green or blue-emitting color segments of the fluorescent layer 9 are deposited in the form of perpendicular triple lines. A plasma cell with a color segment forms a so-called sub-pixel. Three adjacent plasma

cells having each a red, green or blue-emitting color segment together form a pixel, or also called picture element.

Between the back of the fluorescent layer 9 of a green-emitting color segment and the carrier plate 2 there is a green color filter layer 14. In the embodiment shown in Fig.

1 the green color filter layer 14 extends to the side walls of the plasma cells between the fluorescent layer 9 of a green-emitting fluorescent substance and the rib structure 12.

However, it is not necessary for the green color filter layer 14 to cover the whole back wall or all the side walls of the plasma cells. It is sufficient if the back wall and/or the side walls are covered at least partly.

Suitable materials for a green color filter layer 14 have a high transmission between 530 and 550 nm and absorb at 490, 590 and 620 nm. Eminently suitable are Pr^{3+} -containing materials such as PrPO_4 , $[\text{Pr}(\text{PO}_3)_3]_n$, PrF_3 , PrOCl , PrOF , PrOBr , $\text{Pr}_3\text{Al}_5\text{O}_{12}$, PrBO_3 , Pr_2SiO_5 , $\text{Pr}_2\text{Si}_2\text{O}_7$ or PrB_3O_6 , because Pr^{3+} strongly absorbs at 490 nm and 590 nm. Particularly PrPO_4 and $[\text{Pr}(\text{PO}_3)_3]_n$ are suitable for use in a green color filter layer 14.

The green color filter layer 14 can simultaneously work as a reflector for green light that was not emitted in the direction of the front plate 1.

As manufacturing methods for such a green color filter layer 14 may be used both dry coating methods, for example, electrostatic separation or electrostatic supported dry spraying and wet coating methods, for example, screen printing, dispersion methods in which a suspension is introduced with a nozzle moving along the channels, or sedimentation from the liquid phase. The same methods are suitable for manufacturing the fluorescent layer 9.

A Tb^{3+} -activated fluorescent substance such as, for example, $(\text{Y}_x\text{Gd}_{1-x-y})\text{BO}_3:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $\text{LaPO}_4:\text{Tb}$, $(\text{Y}_x\text{Gd}_{1-x-y})_3\text{Al}_5\text{O}_{12}:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $\text{CeMgAl}_{11}\text{O}_{19}:\text{Tb}$, $\text{GdMgB}_5\text{O}_{10}:\text{Ce},\text{Tb}$, $(\text{Y}_x\text{Gd}_{1-x-y})_2\text{SiO}_5:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $(\text{In}_x\text{Gd}_{1-x-y})\text{BO}_3:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $(\text{Y}_{1-x-y}\text{Gd}_x)_2\text{O}_2\text{S}:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $\text{LaOBr}:\text{Tb}$, $\text{LaOCl}:\text{Tb}$ or $\text{LaPO}_4:\text{Ce},\text{Tb}$ is used as a green-emitting fluorescent substance in the fluorescent layer 9. The concentration of Tb^{3+} in the fluorescent substances is situated preferably between 2 and 20 mol%. Preferably $(\text{Y}_{0.7}\text{Gd}_{0.2})\text{BO}_3:\text{Tb}_{0.1}$ is used as a Tb^{3+} -activated fluorescent substance.

For example $(\text{Y}_x\text{Gd}_{1-x})\text{BO}_3:\text{Eu}$ ($0 \leq x \leq 1$), $\text{Y}(\text{V}_x\text{P}_{1-x})\text{O}_4:\text{Eu}$ ($0 \leq x \leq 1$) or $\text{Y}_2\text{O}_3:\text{Eu}$ may be used as a red-emitting fluorescent substance. Preferably $\text{BaMgAl}_{10}\text{O}_{17}:\text{Eu}$ is used as a blue-emitting fluorescent substance.

It may be advantageous for a red color filter layer to be located between the color segments of the fluorescent layer 9 of a red-emitting fluorescent substance and the

carrier plate 2 and/or a blue color filter layer between the color segments of the fluorescent layer 9 of a blue-emitting fluorescent substance. For example, Fe_2O_3 , TaON or CdS-CdSe may be used as pigments for a red color filter layer and, for example, $\text{CoO-Al}_2\text{O}_3$ as pigments for a blue color filter layer or ultramarine. The manufacturing of these color filter layers takes place in accordance with a method described for the manufacture of the green color filter layer 14.

Basically, a green color filter layer 14 may be used in all types of plasma display panels such as, for example, in AC plasma display panels with or without a matrix arrangement of the electrode arrays or DC plasma display panels.

Example of embodiment 1

On a carrier plate 2 with a rib structure 12, a green color filter layer 14 of PrPO_4 was deposited in the plasma cells in which later on there would be a green-emitting color segment of the fluorescent layer 9. Subsequently, $(\text{Y}_{0.7}\text{Gd}_{0.2})\text{BO}_3\text{:Tb}_{0.1}$ was deposited as a green-emitting fluorescent substance on the green color filter layer 14 by means of screen printing. Then the red and blue-emitting color segments were established with $\text{Y}_2\text{O}_3\text{:Eu}$ or $\text{BaMgAl}_{10}\text{O}_{17}\text{:Eu}$, respectively, as fluorescent substances. The carrier plate 2 was used together with a front plate 1 and a gas mixture with xenon as a component generating UV light to build a plasma display panel with an improved color dot for the green pixels.

The color point (x,y) of the green sub-pixel in such a plasma display panel was $x = 0.323$, $y = 0.626$. By comparison, the color point (x,y) of the green sub-pixels of a comparable plasma display panel without a PrPO_4 green color filter layer was $x = 0.331$, $y = 0.584$.

Example of embodiment 2

A plasma display panel similar to the example of embodiment 1 described was made with only $\text{y}_2\text{SiO}_5\text{:5\%Tb}$ being used as a green-emitting fluorescent substance.

The color dot (x,y) of the green sub-pixels in such a plasma display panel was $x = 0.315$, $y = 0.638$. By comparison the color dot (x,y) of the green sub-pixels of a comparable plasma display panel without a PrPO_4 green color filter layer 14 was $x = 0.335$, $y = 0.615$.

CLAIMS:

1. A plasma display panel equipped with a front plate (1) which has a glass plate (3) on which a dielectric layer (4) and a protective layer (5) are deposited, with a carrier plate (2) covered by a segmented fluorescent layer (9) which contains red-emitting color segments of a red-emitting fluorescent substance, blue-emitting color segments of a blue-emitting fluorescent substance and green-emitting color segments of a green-emitting Tb^{3+} -activated fluorescent substance, has a rib structure (12) which divides the space between front plate (1) and carrier plate (2) into plasma cells which are gas-filled, with one or more electrode arrays (6, 7, 10) on the front plate (1) and the carrier plate (2) for generating silent electrical discharges in the plasma cells and has a green color filter layer (14) between the fluorescent layer (9) of a green-emitting color segment and the carrier plate (2).
2. A plasma display panel as claimed in claim 1, characterized in that the green color filter layer (14) contains Pr^{3+} -containing materials.
3. A plasma display panel as claimed in claim 2, characterized in that Pr^{3+} -containing materials are selected from the group PrPO_4 , $[\text{Pr}(\text{PO}_3)_3]_n$, PrF_3 , PrOCl , PrOF , PrOBr , $\text{Pr}_3\text{Al}_5\text{O}_{12}$, PrBO_3 , Pr_2SiO_5 , $\text{Pr}_2\text{Si}_2\text{O}_7$ and PrB_3O_6 .
4. A plasma display panel as claimed in claim 1, characterized in that the green Tb^{3+} -activated fluorescent substance is selected from the group $(\text{Y}_x\text{Gd}_{1-x-y})\text{BO}_3:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $\text{LaPO}_4:\text{Tb}$, $(\text{Y}_x\text{Gd}_{1-x-y})_3\text{Al}_5\text{O}_{12}:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $\text{CeMgAl}_{11}\text{O}_{19}:\text{Tb}$, $\text{GdMgB}_5\text{O}_{10}:\text{Ce,Tb}$, $(\text{Y}_x\text{Gd}_{1-x-y})_2\text{SiO}_5:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $(\text{In}_x\text{Gd}_{1-x-y})\text{BO}_3:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $(\text{Y}_{1-x-y}\text{Gd}_x)_2\text{O}_2\text{S}:\text{Tb}_y$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$), $\text{LaOBr}:\text{Tb}$, $\text{LaOCl}:\text{Tb}$ and $\text{LaPO}_4:\text{Ce,Tb}$.

1/1

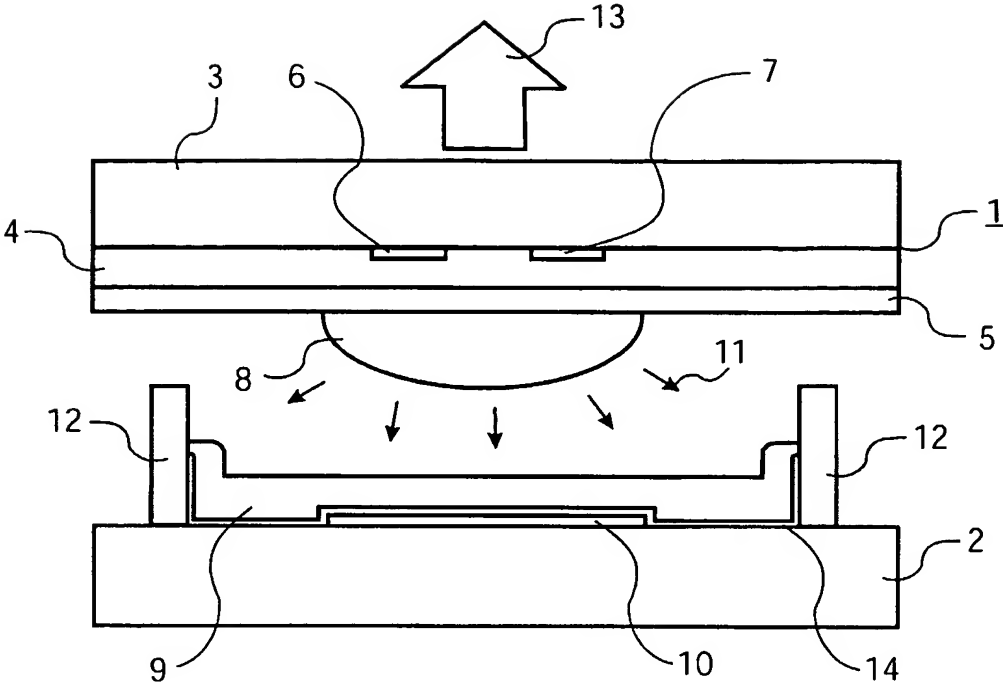


FIG.1

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number
WO 2003/090246 A3

(51) International Patent Classification⁷: **H01J 17/49**,
G02B 5/20, C09K 11/77

(21) International Application Number:
PCT/IB2003/001285

(22) International Filing Date: 9 April 2003 (09.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
102 17 552.7 19 April 2002 (19.04.2002) DE

(71) Applicant (for DE only): **PHILIPS INTELLECTUAL
PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-
damm 94, 20099 Hamburg (DE).

(71) Applicant (for all designated States except DE, US):
KONINKLIJKE PHILIPS ELECTRONICS N.V.
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven
(NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JUESTEL, Thomas**

[DE/DE]; c/o Philips Intellectual Property & Standards
GmbH, Weissshausstr. 2, 52066 Aachen (DE). **MAYR,**
Walter [DE/DE]; c/o Philips Intellectual Property &
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).


(74) Agent: **MEYER, Michael**; Philips Intellectual Property &
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **PLASMA DISPLAY PANEL COMPRISING A TERBIUM(III)-ACTIVATED FLUORESCENT SUBSTANCE**

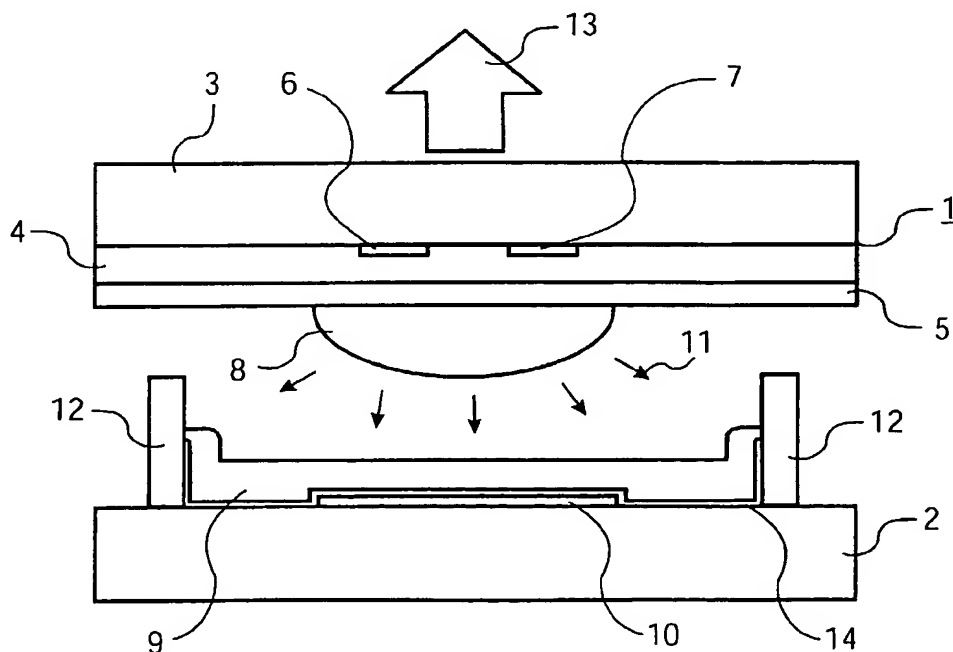

(57) Abstract: The invention relates to plasma display panels with a segmented fluorescent layer (9), in which green color filter layers (14) of Pr³⁺-containing materials of green-emitting color segments are deposited between the fluorescent layer (9) and the carrier plate (2), which improve the color dot of the green light which is emitted by the Tb³⁺-activated fluorescent substance.



Published:

— with international search report

(88) Date of publication of the international search report:

19 August 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

Int. Application No.

PCT/IB 03/01285

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01J17/49 G02B5/20 C09K11/77

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J G02B C09K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 013, no. 197 (P-868), 11 May 1989 (1989-05-11) & JP 01 018820 A (TOSHIBA CORP), 23 January 1989 (1989-01-23) abstract; figure 1 paragraph '0035!	1-4
Y	EP 1 156 507 A (PHILIPS CORP INTELLECTUAL PTY ;KONINKL PHILIPS ELECTRONICS NV (NL)) 21 November 2001 (2001-11-21) abstract; figure 1 paragraphs '0003!, '0004!, '0035!; claim 5 -/-	1-4



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

19 May 2004

Date of mailing of the international search report

04/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Tano, V

INTERNATIONAL SEARCH REPORT

Int. Patent Application No

PCT/IB 03/01285

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 013, no. 173 (E-748), 24 April 1989 (1989-04-24) & JP 01 003946 A (TOSHIBA CORP), 9 January 1989 (1989-01-09) abstract; figure 1 ----	2
Y	EP 0 783 115 A (KUREHA CHEMICAL IND CO LTD) 9 July 1997 (1997-07-09) page 2, line 1 - line 21 page 3, line 28 - line 44 ----	3
A	GB 1 052 394 A (RAULAND CORPORATION) 21 December 1966 (1966-12-21) page 3, right-hand column, line 130 -page 4, left-hand column, line 11 -----	3

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 03/01285

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 01018820	A	23-01-1989	JP 2547763 B2	23-10-1996
			JP 63233420 A	29-09-1988
			JP 1007142 A	11-01-1989
			JP 1018821 A	23-01-1989
			JP 1007141 A	11-01-1989
			JP 1007162 A	11-01-1989
			JP 1007163 A	11-01-1989
			JP 1007164 A	11-01-1989
			JP 1026229 A	27-01-1989
			JP 1018815 A	23-01-1989
			JP 1007138 A	11-01-1989
			JP 2645015 B2	25-08-1997
			JP 1026230 A	27-01-1989
			JP 2656255 B2	24-09-1997
EP 1156507	A	21-11-2001	DE 10024836 A1	22-11-2001
			CN 1325125 A	05-12-2001
			EP 1156507 A2	21-11-2001
			JP 2002033055 A	31-01-2002
			US 2002041156 A1	11-04-2002
JP 01003946	A	09-01-1989	NONE	
EP 0783115	A	09-07-1997	EP 0783115 A2	09-07-1997
			JP 9188796 A	22-07-1997
			US 5759448 A	02-06-1998
GB 1052394	A		NONE	